# 36", WINE CELLAR, 0FW Model FULLY INTEGRATED

**INTEGRATED® SERIES** 








Bottle

0,75 lt





Fhaha

### **FEATURES**

- Made in Italy
- OptiView™: OptiView LED lights
- ProVent™: Uniform air circulation maintains consistent temperatures throughout the appliance resulting in better food preservation
- Humidity Control: Choose between high, medium and low humidity particularly important for wine storage
- Total No Frost: Temperature control helping mitigate cooling loss when opening the refrigerator door. No more frost build-up that requires defrosting
- EquiLance™: Achieve a seamless built-in look with Fhiaba's innovative door hinge

GENERAL PROPERTIES	
Equilance Hinge	YES
Soft-Closing Glides	NO NO
Low Vibration	YES
OptiView (Led Light Spots)	YES
Shelves	13
Type Of Shelves	WOOD
Door Bins	N/A
Fridge Interior Drawers	N/A
Freezer Drawers	N/A
Evenlift Shelves	NO NO
Full Extension Shelves 90° Door Opening	YES
Full Extension Drawers 90° Door Opening	NO NO
Defrost Process	AUTOMATIC
Ice Maker With Water Filter	NO NO
Door Open Alarms	YES
Shopping Fridge	NO NO
Shopping Freezer	NO NO
Power Failure Alert	YES
Water Dispenser With Water Filter	NO NO


36", WINE CELLAR, 0FW Model

## **FULLY INTEGRATED**

**INTEGRATED® SERIES** 

## **PRODUCT DETAIL**





**DIMENSIONS & WEIGHT** 



**D** = door

**M** = separate microclimates

Filaba

CAPACITY	
Net Capacity	20.8 cuft (590 l)
Upper Compartment Wine Cellar Capacity (Bottles)	96
Lower Compartment Wine Cellar Capacity (Bottles)	90
TECHNICAL DETAILS	
Total Absorbed Current (A)	2.5
Voltage (V)	115
Frequency (Hz)	60
Power Cord Length	78 3/4" (2 m)
Plug Type	3-prong (15 Amp)
Climate Class	SN/T
Refrigerant (Gas)	R600a
Water Connection / Female Attachment	N/A
EFFICIENCY	
Estimated Yearly Electricity Use	255 kwh

DIMENSIONS & WEIGHT	
Height Of The Product (Minimum)	83 1/2" (2120 mm)
Adjustable Feet Height	up to 1" (25 mm)
Width Of The Product	35 7/8" (912 mm)
Depth Of Product Without Handle	24" (610 mm)
Cut-out Height	84" (2134 mm)
Cut-out Width	36" (914 mm)
	min 24" (610 mm)
Cut-out Depth	+ panel thickness for flush install
Net Weight	381 lbs (173 kg)
Gross Weight	428 lbs (194 kg)
TEMPERATURE RANGES	
Climate Zones	2
Compartment 1 / Upper Temperature	from 39°F (4°C) to 64°F (18°C)
Compartment 2 / Middle Temperature	N/A
Compartment 3 / Low Temperature	from 39°F (4°C) to 64°F (18°C)

36", WINE CELLAR, OFW Model

## **FULLY INTEGRATED**

**INTEGRATED® SERIES** 


## PRODUCT SPECIFICATIONS AND DIMENSIONS


Fhaha




## **FRONT VIEW**

**SIDE VIEW** 






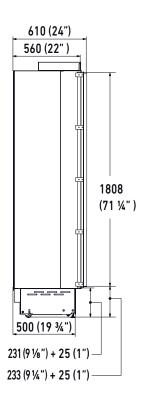


Area to be left clear for the anti-tipping brackets

#### **CUSTOM PANELS INFORMATION**

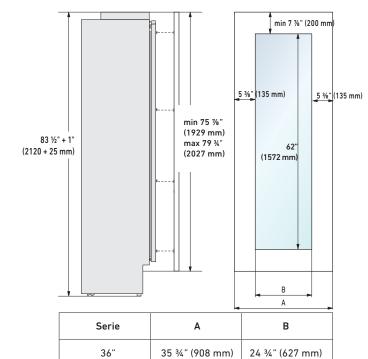

## **PLINTH SIZE**





## INTEGRATED PANEL RECOMMENDATIONS

Panels with thickness ranging between 3/4" in (18 mm) and 11/8" in (28 mm)

Door Panels Weight Max	75 lbs (34 kg)
Drawer Panels Weight Max	N/A lbs (N/A kg)

36", WINE CELLAR, OFW Model

## **FULLY INTEGRATED**

**INTEGRATED® SERIES** 

## PRODUCT SPECIFICATIONS AND DIMENSIONS

**TOP VIEWS** 

Door swing clearance

Minimum distance from the wall (hinge side)

36" model: 1489 mm (58 5%")


7000

36" model: 885 mm (34 %")
610 mm (24")
560 mm (22")
36" model: 912 mm (35 %")

Width of the body of the appliance

Width of appliance with mounting brackets installed (effective width)

### **Electrical Connection**

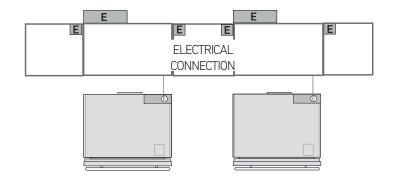



Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.

IMPORTANT: do not put the water shut-off valve behind the

FARIA

**IMPURIANT:** do not put the water shut-off valve behind the appliance where it will be inaccessible.