UCB602TPO



60 cm, UNDERCOUNTER BEVERAGE/FRIDGE - PREMIUM OUTDOOR, Model BUILT-IN



FEATURES

• Made in Italy.

- Aisi 304 stainless steel body.
- Stainless steel interior finish
- Antibacterial stainless steel interior.
- Optiview: multi LED light array (top and side interior) provides brilliant illumination to the entire interior.
- Soft close door and drawers in all compartments
- Smart OLED display
- Acoustic and visual signals
- Total no frost 100% automatic system
- Isulated variavle speed compressors manteins precision temperature control with low vibration.
- Sabbath mode
- Front and rear adjustable feet up to 25 mm.
- Two indipendent climatic zone.
- Tempered glass shelves with aluminium profiles.
- Chill to serve: you can rapidly lower the temperature to 2°C before serving.
- Built-in / Stainless steel front and handle
- Bronzed glass door and Argon gas guarantee maximun protection from harmful UV light rays.
- Reversible door.
- Low vibration compressor
- Full range of models and configurations.Can easily be combined and configured with other Fhiaba fridge, freezer, wine cellar models to fit your kitchen needs.



GENERAL PROPERTIES	
Reversible door	YES
Equilance	NO
SoftClosing Runner	YES
Low vibration	YES
Optieview (LED light spots)	YES
Shelves	5
Slide-out shelves	YES
Type of shelves	GLASS
Door Bins	
Fridge drawers type	
Fresco/LowTemp Drawers	
Bottom drawers	
Full Extension shelves 90° door opening	YES
Full Extension drawers 90° door opening	NO
Defrost Process	AUTOMATIC
Ice maker with water filter	NO
Door Open Alarms	YES
Humidity control	NO
Active carbon filter	NO
Air filter control	YES
Shopping Fridge	NO
Shopping Freezer	NO
Power Failure Function	YES


UCB602TPO


60 cm, UNDERCOUNTER BEVERAGE/FRIDGE - PREMIUM OUTDOOR, Model



BUILT-IN







1D | 1M

D = door M = separate microclimates

CAPACITY	
Volume Compartment 1 (L)	
Volume Compartment 2 (L)	
Volume Compartment 3 (L)	
Total Net Volume (L)	
Total Gross Volume (L)	
Compartment 1 / Upper wine cellar	41
capacity (bottles)	41
Compartment 2 / Lower wine cellar	
capacity (bottles)	
Undercounter glass shelf capacity (cans)	42
Undercounter drawer capacity (cans)	
Undercounter bottom wooden bottle	11
holder (bottles)	

TECHNICAL DETAILS

1.5 220-240V
-
220-240V
50-60 Hz
2
Schuko 16A
SN/T
R600a

EFFICIENCY	
New Energy Label class	
Energy consumption (kWh/year)	
DIMENSIONS & WEIGHT	
Height of the product (closed weels) (mm)	865
Adjustable feet height (mm)	25
Width of the product (mm)	598
Depth of Product without handle (mm)	576
Wall cavity height (mm)	870
Wall cavity width (mm)	600
Wall cavity depth (mm)	600
Net Weight (kg)	63
Gross Weight (kg)	78
TEMPERATURE RANGES	
Climatic compartments	2
Compartment 1 / Upper temperature (°C)	from 2 to 8
Compartment 2 / Middle temperature (°C)	from 2 to 8
Low temp zone	NO
Compartment 3 / Low temperature (°C)	
Dual zone	NO

3/5 Product sheet - All specifications are subject to change without notice


Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated

plinth to be installed on the equipment.


UCB602TPO 60 cm, UNDERCOUNTER BEVERAGE/FRIDGE - PREMIUM OUTDOOR, Model

BUILT-IN

UNDERCOUNTER® SERIE

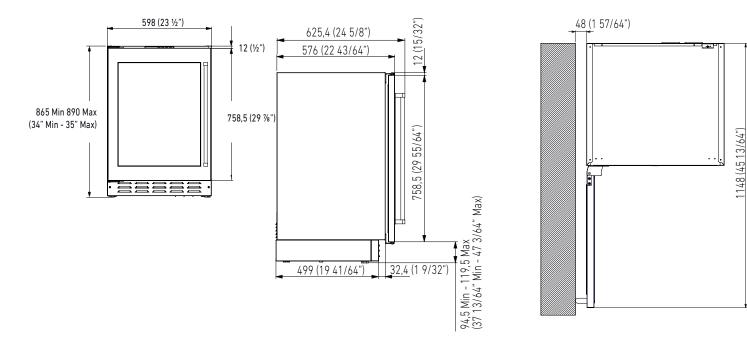

Electrical and Water connection





For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.



Fhaba


UCB602TP0

60 cm, UNDERCOUNTER BEVERAGE/FRIDGE - PREMIUM OUTDOOR, Model



BUILT-IN

UNDERCOUNTER® SERIE

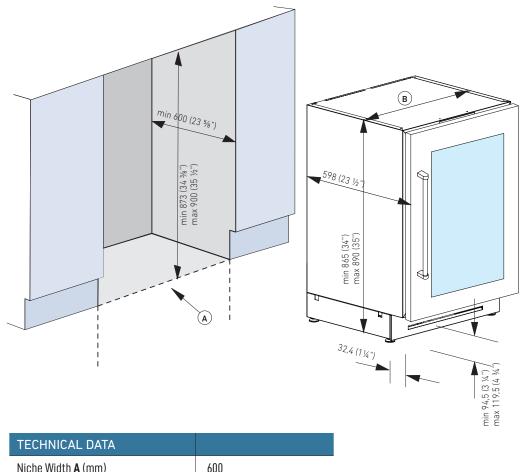

	Unit Width B (mm)	598
1		

Panel Dimensions

Integrated Panel Recommendations

UCB602TPO 60 cm, UNDERCOUNTER BEVERAGE/FRIDGE - PREMIUM OUTDOOR, Model BUILT-IN UNDERCOUNTER® SERIE



ACCESSORIES

- Glass door
- Stainless steel tubolar handless 30mm
- Stainless steel tubolar handless 18mm
- Extra lenght anti-tipping kit
- Cleaning kit
- Painting



For installation specifications, please consult with Fhiaba. For optimum installation, we recommend using the actual product as the best guide.

